


primeline

VARIABLE RAKE SHEARS

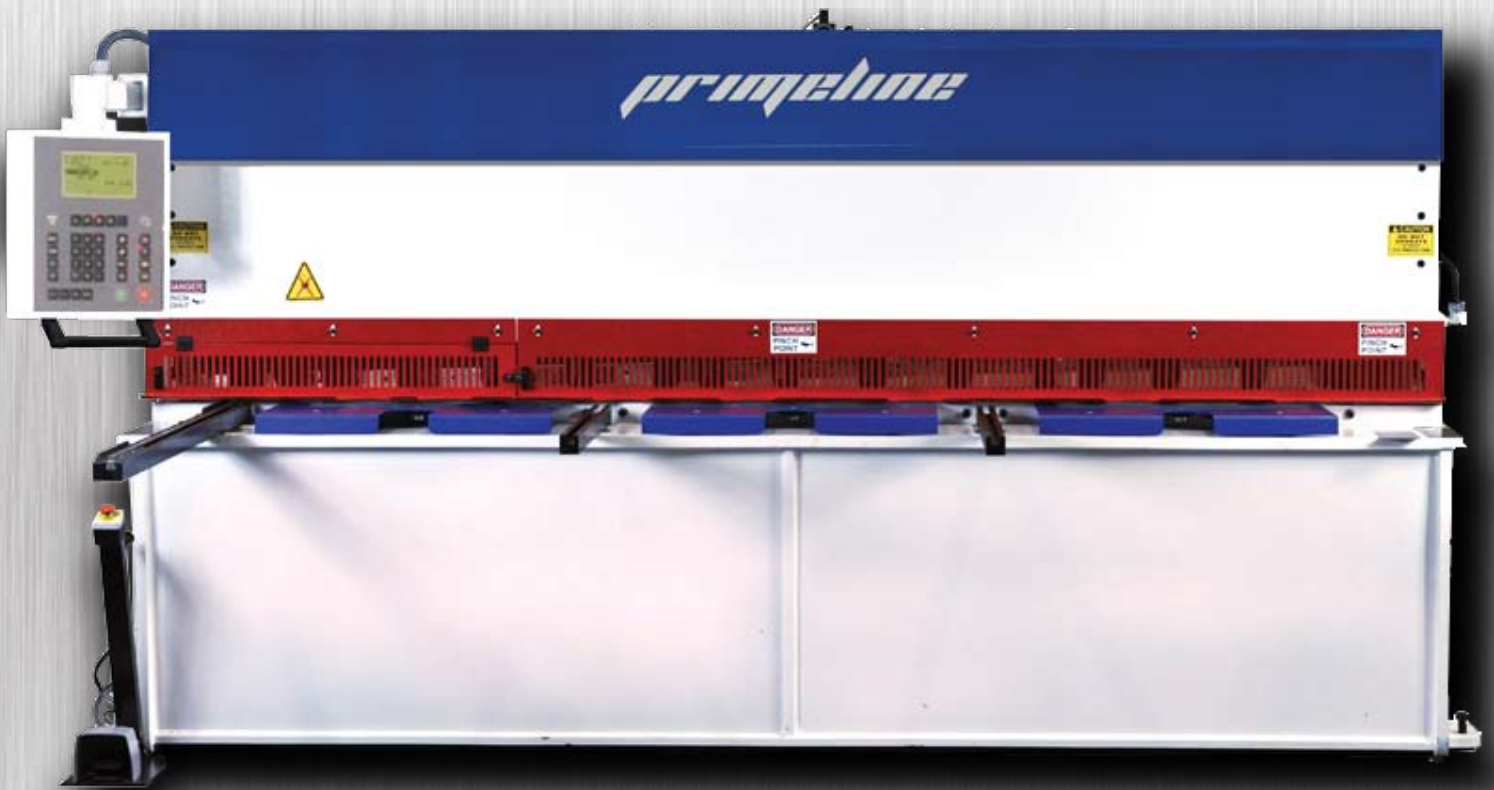

**AVAILABLE IN
CAPACITIES FROM
10' x 1/4" TO 13' x 3/4"**

FEATURES:

- Variable Rake type
- Rigid steel frame, featuring welded construction of the main frame and blade beam
 - Upper blade mounted on maintenance-free, self-aligning, spherical bearings
 - Hydraulic unit conveniently located on top of the machine
- Variable rake angle of upper blade from .3° to 2°
 - Adjustable blade gap settings
 - Ball transfers in table
 - Non-marking hydraulic holddowns

STANDARD EQUIPMENT:

- 40" Power front-operated back gauge
- Shadow line
- Dual voltage electrics for 220/60/3 or 440/60/3, Low voltage at the controls (24vDC), Key lock switch for On/Off power supply, Emergency stop buttons
- Electric foot switch on trailing lead
- 40" Squaring arm with spring loaded flip stops
- 13" Throat (gap) in side frames

OPTIONAL EQUIPMENT:

- Long squaring arms (6', 8', 10' & 12')
- Pneumatic sheet support devices
- Front load and rear stacking options
- Other accessories available



Cybelec DNC 60

Sample sizes:

MODEL	Cut Length	Cycles		Backgauge Range	Backgauge Speed	Number of Holddowns	Weight
		Min	Max				
VS 10250	122"	12	30	39"	7.87"/sec	14	16,600
VS 10500	122"	10	20	39"	7.87"/sec	14	27,500
VS 13250	160"	10	28	39"	7.87"/sec	18	25,000
VS 13500	160"	8	14	39"	7.87"/sec	18	43,500

All data are approximate.

The right is reserved to change design, specifications and construction.



P.O. Box 207, White Marsh, Maryland 21162-0207

Phone: (410) 933-8500 Fax: (410) 933-1600

Internet: www.comeq.com E-Mail: sales@comeq.com

© COMEQ, Inc. 8/09

YOUR AUTHORIZED DISTRIBUTOR: